

IZAR CENTER

HYDROMETER

M-BUS | MASTER



APPLICATION

The IZAR CENTER as an M-Bus level converter is able to do readings of M-Bus meters with very high resolution (up to 1 minute possible) and over vast distances (5 km and more by using repeaters). The reading of IZAR RADIO meters is possible by using the HYDROMETER M-BUS RECEIVER.

FEATURES

- ▶ 25, 60, 120 or 250 M-Bus devices connectable to one IZAR CENTER
- ▶ Automatic transmission of meter data via internet connection using integrated LAN interface or external analog/GSM/GPRS modem
- ▶ Automatic meter identification by searching the M-Bus network
- ▶ Fast and standardized up-to-date communication interfaces
- ▶ (Remote) reading and configuration via USB, RS232/modem or LAN interface
- ▶ Alarm functionality on consumption and on instantaneous values with notification (email, SMS)
- ▶ Compact housing with rail-mounting possibility
- ▶ M-Bus master and level converter in one device. IZAR CENTER (without memory) can also be used as M-Bus repeater (amplifier)
- ▶ Cascadable to connect more devices or to build up larger M-Bus networks
- ▶ Also available as pre-configured system with or without modem in IP 65 or IP 66 installation housing

IZAR CENTER

M-BUS | MASTER

PRINCIPLE OF OPERATION

The IZAR CENTER is sending out a request to the connected meters. This action could be initiated manually by the user or automatically by the IZAR CENTER. For automatic reading an IZAR CENTER with memory is required to program general or meter individual reading intervals. The meter is responding to that request by giving its values to the IZAR CENTER. The meter data is stored in an inbuilt memory and can be transmitted automatically to a meter reading software (e.g. IZAR@NET Software).

GENERAL

	With / without memory
Interfaces	USB, Ethernet LAN, RS232 (for PC, modem), M-Bus output and M-Bus repeater input
Housing	Light-grey rail mount housing with fuse profile made of heat resistant plastic
M-Bus transmission speeds	300, 600, 1200, 2400, 4800, 9600 baud; autobaud detection on RS232

Note:

IZAR CENTER can only be used in combination with the following modem types:

Analog modem: Xmodus 1520S

GSM/GPRS modem: Xmodus 1510S

We have these modems in our product portfolio. Please ask your sales representative for an offer.

TECHNICAL DATA

	With / without memory
Power supply	V AC 110 ... 230
Frequency	Hz 50 ... 60
Weight	g 500
Protection class	IP 20
Ethernet LAN communication speed	kByte/s 1.5


AMBIENT CONDITIONS

	With / without memory
Humidity	% 10 ... 90
Temperature range	°C - 20 ... 70

IZAR CENTER

M-BUS | MASTER

DIMENSIONS

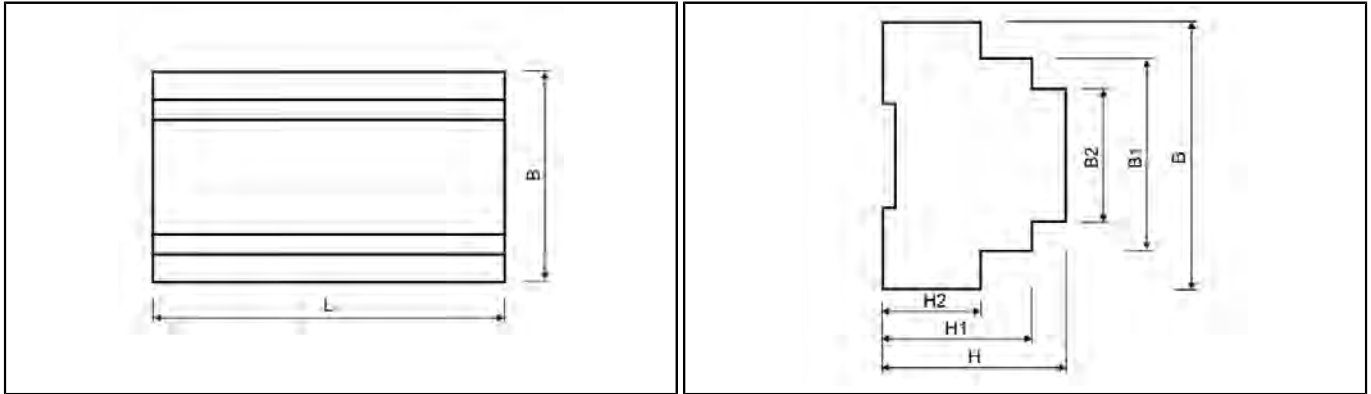

With / without memory			
Length	L	mm	157.5
Width	B	mm	86
Width	B1	mm	59
Width	B2	mm	42
Height	H	mm	60
Height	H1	mm	49
Height	H2	mm	32

VERSIONS

Memory	without	with
M-Bus level converter	•	•
M-Bus master functionality	-	•
M-Bus repeater functionality	•	-
256 MByte mass storage integrated	-	•
Device list to manage up to 1,000 meters	-	•
Data ring memory for 500,000 device readouts	-	•
Programmable automatic meter readout	-	•
Parallel readout of memory and reading of meters	-	•
Setting of individual reading intervals and retries	-	•
Automatic transmission of meter data to FTP server	-	•
Use alternate FTP server if upload fails	-	•
Alarm functionality with notification (Email, SMS)	-	•
Control M-Bus devices on alarm (e.g. switch a valve)	-	•

HYDROMETER

HYDROMETER GmbH · Postfach 1462 · 91505 Ansbach
 Tel. +49 981 1806-0 · Fax: +49 981 1806-615 · info@hydrometer.de · www.hydrometer.de
 Subject to technical adjustments